


UNIRAIL S – EN 50264-3-2 300 V – type MM

UNIKA (Italy) – EN 50264-3-2 300 V 3x1 MMG - code

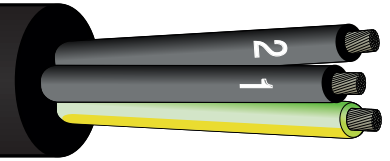

TECHNICAL DATA

Temperature rating up to and including 90°C
Very low temperatures resistance (-40°C)
Resistance to ozone, oils, fuels, acids and alkali
Bending radius: refer to EN 50343 table 16
Range of approval: According to table 1 (cross-section 1 ÷ 2,5 mm ²) of EN 50264-3-2 for cables rated 300V (see IMQ test certificate)

Item n°	Cross-section [mm ²]	Diameter [mm]	Cable mass [kg/km]	Item n°	Cross-section [mm ²]	Diameter [mm]	Cable mass [kg/km]
RB401	2x1	5,3 ÷ 6,2	42	RB412	7x1,5	8,7 ÷ 10,2	153
RB425	3x1	5,7 ÷ 6,9	58	RB429	8x1,5	9,8 ÷ 11,0	190
RB402	4x1	6,1 ÷ 7,2	67	RB413	9x1,5	10,9 ÷ 12,7	197
RB426	5x1	6,9 ÷ 8,1	95	RB414	12x1,5	11,8 ÷ 13,8	257
RB403	7x1	7,5 ÷ 8,7	111	RB415	19x1,5	14,2 ÷ 16,6	402
RB428	8x1	8,5 ÷ 9,7	140	RB416	24x1,5	16,6 ÷ 19,5	503
RB404	9x1	9,1 ÷ 10,6	150	RB417	32x1,5	18,7 ÷ 21,9	674
RB427	10x1	9,8 ÷ 11,2	170	RB418	37x1,5	19,5 ÷ 22,8	761
RB405	12x1	9,8 ÷ 11,5	180	RB437	3x2,5	7,6 ÷ 8,4	122
RB433	16x1	11,6 ÷ 12,4	268	RB419	4x2,5	8,3 ÷ 9,8	138
RB436	18x1	12,3 ÷ 13,1	303	RB420	7x2,5	10,2 ÷ 11,9	232
RB406	19x1	11,7 ÷ 13,7	278	RB421	9x2,5	12,9 ÷ 15,1	309
RB407	24x1	14,1 ÷ 16,5	363	RB422	12x2,5	13,9 ÷ 16,3	396
RB408	32x1	15,5 ÷ 18,2	468	RB423	19x2,5	16,3 ÷ 19,1	601
RB409	37x1	16,1 ÷ 18,9	530	RB424	24x2,5	19,6 ÷ 22,9	776
RB410	40x1	16,7 ÷ 19,6	572	RB430	2x1,5	6,7	70
RB411	4x1,5	7,3 ÷ 8,6	94	RB431	6x1,5	9,3	150
RB434	5x1,5	9,0 ÷ 9,8	168	RB432	2x2,5	7,5	96

Add letter **G** after the item number for cables with yellow/green conductor

CONSTRUCTION

Type: multicore unshielded cable

Conductor: tinned copper conductor according to class 5 EN 60228

Tape (optional): coloured tape

Insulation: crosslinked compound, type EI109 according to Standard EN 50264-1, colour black with numbers with or without yellow-green if not otherwise stated (upon request compound type EI110)

Tape: non-hygroscopic tape on the assembly

Sheath: crosslinked compound, type EM104 according to Standard EN 50264-1, colour black if not otherwise stated

Marking: UNIKA (Italy) – EN 50264-3-2 300V (*core number x cross-section*) MM (MMG with yellow-green) – WW/YYYY - *traceability code*

Fire safety: hazard level HL3 according to Standard EN 45545-2 for indoor cables (EL1A) and outdoor cables (EL1B)

The characteristics of the products, described in the data sheet, do not constitute any contractual binding. UNIKA spa reserves the right to change the specifications without any notice. Partial or total reproduction of this document is forbidden.

Unless otherwise specified, all values are nominal, other values can be provided on request. The images are made for the sole purpose of illustrating the product and are purely indicative.