


UNIRAIL D – MVB and WTB cables

Type: **MVB 1x4x0,50**

Code: **RW105C**

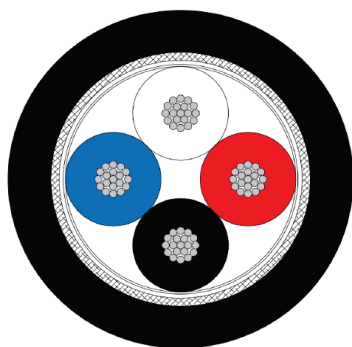


CONSTRUCTION

Conductor	stranded tinned copper wire – 0,50 mm ² (19 wires)
Insulation	foam skin polyolefin
Insulation colours	White, red, black, blue
Assembly of core	4 cores stranded to quad
Overall shield	metallic tape, tinned copper braid, coverage 85%
Outer sheath	crosslinked compound, type EM104 according to standard EN 50264-1 - black colour if not otherwise stated


Type: **WTB 1x2x0,75**

Code: **RW105A**

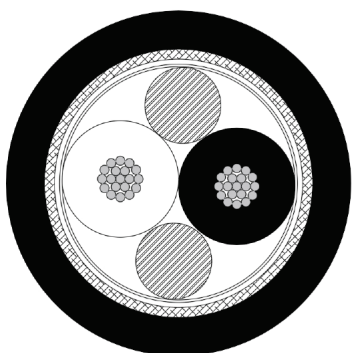

CONSTRUCTION

Conductor	stranded tinned copper wire – 0,75 mm ² (19 wires)
Insulation	foam skin polyolefin
Insulation colours	White - Black
Assembly of core	2 cores stranded to pair
Overall shield	metallic tape, tinned copper braid, coverage 85%
Outer sheath	crosslinked compound, type EM104 according to standard EN 50264-1 - black colour if not otherwise stated

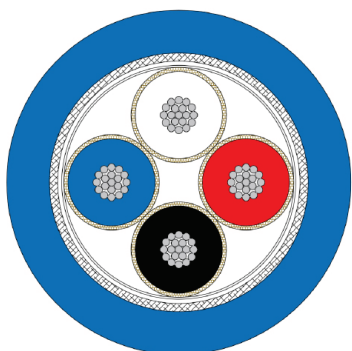



Type: **MVB 1x4x0,50 EN 50200 PH15**

Code: **RW106C (blue) - RW106CV (green)**

CONSTRUCTION

Conductor	stranded tinned copper wire – 0,50 mm ² (19 wires)
Insulation	foam skin polyolefin
Fire barrier	special mineral glass tape with overlap over core insulation
Insulation colours	White, red, black, blue
Assembly of core	4 cores stranded to quad
Overall shield	metallic tape, tinned copper braid, coverage 85%
Outer sheath	crosslinked compound, type EM104 according to standard EN 50264-1 - blue or green

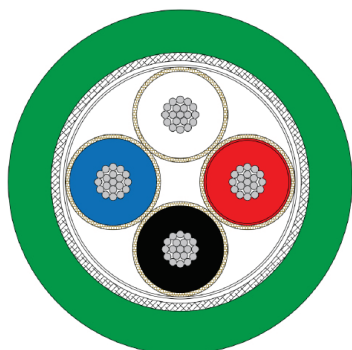


CONSTRUCTION

Conductor	stranded tinned copper wire – 0,75 mm ² (19 wires)
Insulation	foam skin polyolefin
Insulation colours	White - Black
Fire barrier	special mineral glass tape with overlap over core insulation
Assembly of core	2 cores stranded to pair
Overall shield	metallic tape, tinned copper braid, coverage 85%
Outer sheath	crosslinked compound, type EM104 according to standard EN 50264-1 - blue colour if not otherwise stated

	MVB 1x4x0,50 RW105C	WTB 1x2x0,75 RW105A	MVB 1x4x0,50 EN 50200 RW106C/ RW106CV	WTB 1x2x0,75 EN 50200 RW106D		
DC conductor resistance	≤ 40,1 Ω/km	≤ 26,7 Ω/km	≤ 40,1 Ω/km	≤ 26,0 Ω/km		
Capacitance	48 pF/m (data pair)	65 pF/m (data pair)	48 pF/m (data pair)	65 pF/m (data pair)		
Characteristic impedance (0,5÷5 MHz)	120 Ω (±10%)					
Voltage rating	300 V					
Min insulation resistance	1,0 GΩ x km	1,0 GΩ x km	1,0 GΩ x km	1,0 GΩ x km		
Nominal velocity of propagation 100MHZ	66%	74%	66%	66%		
			Before EN 50200	After EN 50200	Before EN 50200	After EN 50200
Nom attenuation	1 MHz	14,0 dB/km	12,0 dB/km	12,0 dB/km	12,0 dB/km	12,0 dB/km
	1,5 MHz	15,0 dB/km	21,1 dB/km	15,0 dB/km		
	2 MHz	24,1 dB/km	17,0 dB/km	14,0 dB/km	14,0 dB/km	14,0 dB/km
	3 MHz	20,0 dB/km	26,7 dB/km	20,0 dB/km		
Nominal weight	98 kg/km	105 kg/km	100 kg/km	116 kg/km		
Nominal outer diameter	8,3 mm	8,4 mm	8,1 mm	8,7 mm		
Minimum bending radius, fixed installation	10 x outer ø					
Temperature range, fixed installation	-40 °C +90°C					

Fire safety: cables are classified in compliance with the highest requirements established by hazard level HL3 into Standard EN 45545-2 for indoor cables (EL1A) and outdoor cables (EL1B).

The characteristics of the products, described in the data sheet, do not constitute any contractual binding.

UNIKA spa reserves the right to change the specifications without any notice. Partial or total reproduction of this document is forbidden.

TDS_RD06_00